




INSTALLATION INSTRUCTIONS PART 18SS2 GL1800 ADJUSTABLE PASSENGER PEGS

Note: Read instruction thoroughly before installing.

1. Place bike on center stand.
2. Remove Passenger floorboards by removing the two Allen bolts under the board.
3. Install new 8 mm bolts with washers through floorboards, then install parts in sequence shown and re-install whole assembly. Rotate Eccentric Bushing for up position adjustment. Tighten firmly.

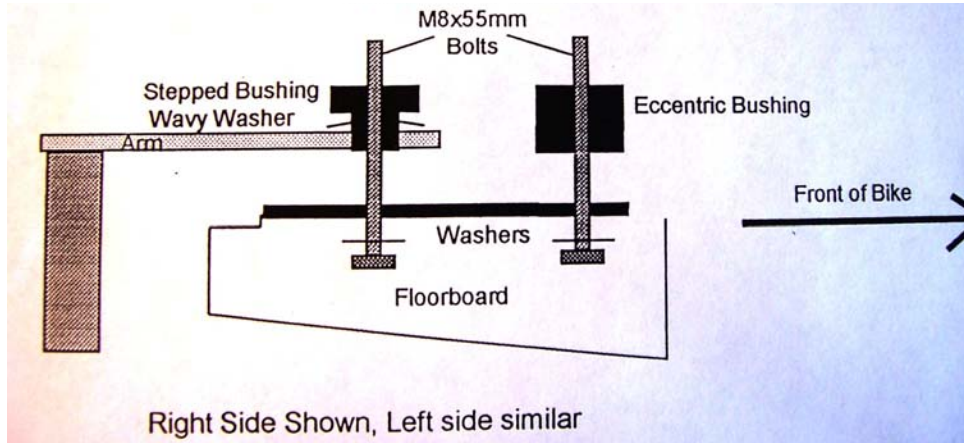

133 Gold St, Worcester, MA 01608 508-791-7552 800-821-9861 fax 508-793-2919 email: info@addonaccessories.net