



MOUNTING INSTRUCTIONS FOR 45-1253R GL1800 15673-187R GL1500 MASTER CYLINDER COVER WITH LIGHTED SWITCHES

Note: Read instructions thoroughly before installing.

Tools required: 6MM Hex Allen Wrench, 10MM Wrench, Flat Blade Screwdriver, #1 Small Phillips Screwdriver.

1. Place bike on center stand.
2. Install wiring harness through Fig 1 route to fused accessory terminal at fuse box under fuel tank cover.
3. Mount box to brake master cylinder with brake pivot bolt.
4. Connect Green wire to a convenient terminal.
5. Install wire harness as shown in Figure 1 through each cutout. Connect four rocker switches to respective wire harness leads.
6. Connect Red wire to fused terminal at terminal block located under fuel tank accessories door. Make sure none of the switch terminals are contacting the switch box or adjacent switches.
7. Turn on ignition key to check light function of each switch. (Make sure all lights function in same position.)
8. Turn off power and install switches into cover by depressing springs on switch. **NOTE WHICH COLOR CODED WIRE GOES TO EACH POSITION.**
9. Connect corresponding color-coded wire to accessory hot wire that you wish to activate.
10. Insert lever bolt into hole prior to pushing box over the black reservoir. You must push down steadily with hand on box at the same time as tightening the bolt. (Using a flat bladed screwdriver and 10MM wrench into nut. Do not attempt to draw box down onto reservoir box by only tightening the lever bolt. This will definitely cause the box to crack. Be careful not to allow screwdriver to slip against chrome surface. **CAUTION:** Over tightening of bolt after box is finally down as far as possible may cause box to crack.


WIRING GUIDE

RED - Power


GREEN - Ground

BLUE, YELLOW, BLACK, ORANGE - Accessories

Figure 1

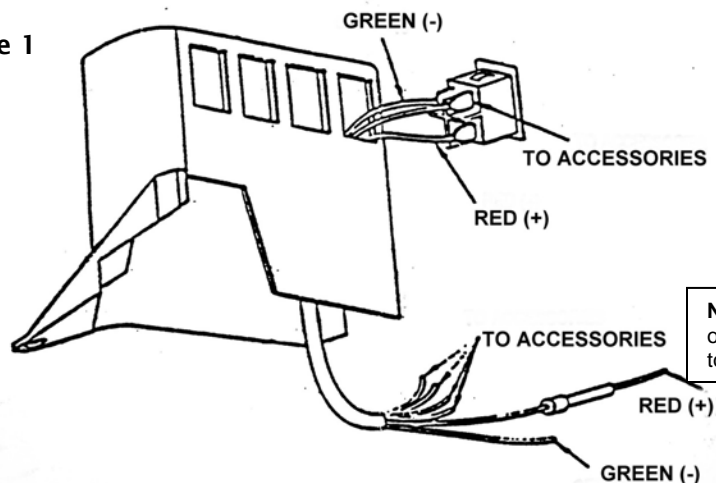

Note: Lighted switches are wired as one of the below.

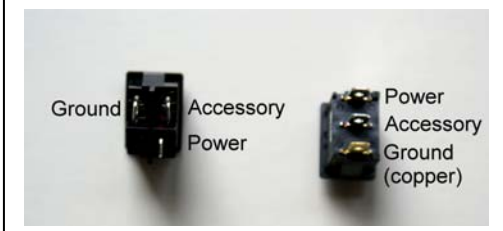

Note: Fuse is different on GL1800 compared to GL1500.